

SPRING HANGERS ACC-5080



Natural Frequency: 7 to 10 Hz.


APPLICATIONS

Rubber damper for suspending ceilings and mechanical equipment with speeds from 600 rpm, false ceilings, fans, motors, pumps, air conditioning, compressors, etc.

DESCRIPTION

- Metal parts in zincated Steel, even stainless steel.
- Elastic material of natural rubber, silicone, NBR, neoprene, etc.
- Hardnesses from 40 shore.
- Silicone damper can withstand temperatures of -60°C to 280°C.
- Fixings can be mixed female-female, male-female.

DIMENSIONAL FEATURES

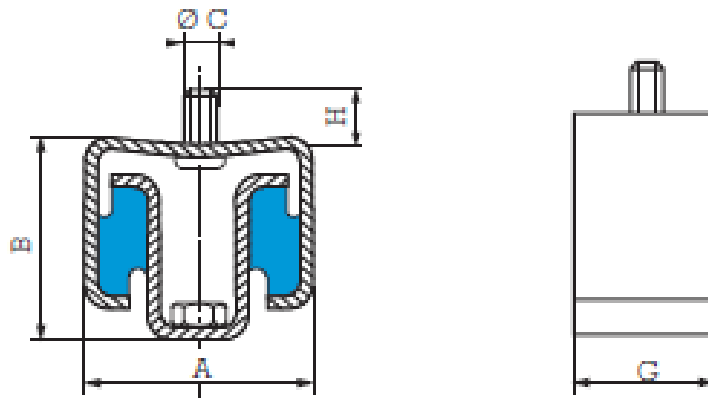

Model	A (mm)	B (mm)	C (mm)	G (mm)	H (mm)	Fixation	Rigidity 45 IRHD		Rigidity 60 IRHD		Rigidity 70 IRHD	
							(daN)	(mm)	(daN)	(mm)	(daN)	(mm)
ACC-5080-01	38	47	M6x1,00	16	7	M-H/H-H	4-18	4	7-30	4	10-50	4
ACC-5080-02	38	47	M7x1,50	16	17	M-H/H-H	4-18	4	7-30	4	10-50	4
ACC-5080-03	47	55	M8x1,25	30	13	M-H/H-H	10-52	4	20-80	4	30-70	4
ACC-5080-04	50	74	M12x1,75	40	17	M-H/H-H	20-90	4	30-140	4	40-160	4