

LOW FREQ. SPRING DAMPER WITH CUSHION.

ACC-9070

Nat. Freq.
Axial: 7,0 - 11 Hz
Radial: 4,5 - 7 Hz




APPLICATIONS

Anti-Vibration and shock absorber mount. For supporting rotating equipment with a speed above 500 rpm, fans, engines, air conditioning, compressors, electronic. etc.

DESCRIPTION

- Aluminium housing.
 - Stainless Steel 18/8 internal spring.
 - Internal Stainless Steel mesh cushion.
 - Stainless Steel fastening
 - Natural Frequency:
 - Axial: 7,0 - 11 Hz
 - Radial: 4,5 - 7 Hz.
- Shock Maximum displacement: axial: 5 mm, radial: 4 mm.

DIMENSIONS

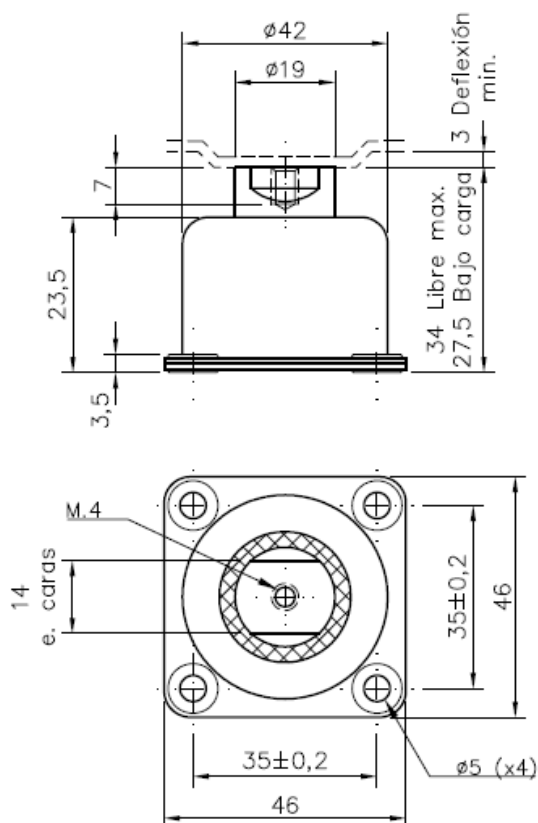

Part	Static load range (daN)
ACC-9070-01	0,25 - 0,45
ACC-9070-02	0,35 - 0,80
ACC-9070-03	0,70 - 1,50
ACC-9070-04	1,00 - 2,50
ACC-9070-05	2,50 - 4,50

LOW FREQ. SPRING DAMPER WITH CUSHION. ACC-9070



STATIC CURVES

